

**DURA WM**

■ Grey



IP66	IK09	22_0V 240V	CRI >70	MADE IN MALAYSIA
------	------	---------------	------------	---------------------

Floodlight

**Features**

- Lumen Maintenance : L90 @ 70,000 hours
- Working Temperature : -25°C ~ 50°C
- Storage Temperature : -25°C ~ 80°C
- Power Factor : >0.95 at Full Load
- THD : <20% at Full Load
- IP Protection : IP66 Optical Compartment

**Material**


- Casing : Pressure Casted Aluminium ADC12, Powder-Coated Finishing
- Cover : 5mm Tempered Glass
- Bracket : Mild Steel / Stainless Steel (Optional)
- Dimming : (Optional) 0-10V / DALI / Timer

**Advantages**

- Modular Design: Gear compartment separated from LED module to reduce heat. Higher power can be upgraded in the future without having to replace whole fixture.
- Support NEMA socket for smart control.

**Application**

Applicable for Sports Lighting, Ports, Stadium, Highmast Lighting, Amenity Lighting and Tunnel Lighting.




270°  
Side locking bolts

## Specifications


Model No.	Power	Input current	Weight	CCT	Efficacy	Lumen
OLE Dura WM120	120W	0.52A	11.2kg	<3500K	124 lm/W	14880 lm
				4000K	130 lm/W	15600 lm
				5000K	132 lm/W	15840 lm
				6000K	132 lm/W	15840 lm
OLE Dura WM180	180W	0.78A	14.1kg	<3500K	134 lm/W	24120 lm
				4000K	140 lm/W	25200 lm
				5000K	142 lm/W	25560 lm
				6000K	142 lm/W	25560 lm
OLE Dura WM240	240W	1.04A	14.1kg	<3500K	123 lm/W	29520 lm
				4000K	128 lm/W	30720 lm
				5000K	130 lm/W	31200 lm
				6000K	132 lm/W	31680 lm
OLE Dura WM300	300W	1.30A	17kg	<3500K	132 lm/W	39600 lm
				4000K	139 lm/W	41700 lm
				5000K	141 lm/W	42300 lm
				6000K	141 lm/W	42300 lm

\* Flux data based on Ta = 25°C, CCT & Lumen +-10%

## Photometric Data

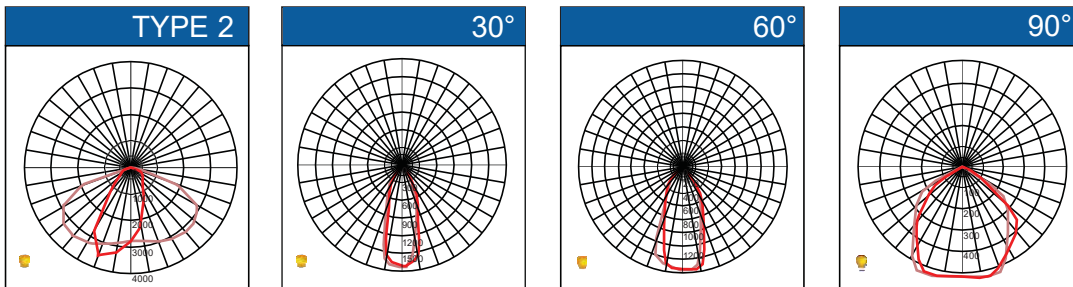

Feature Diagram

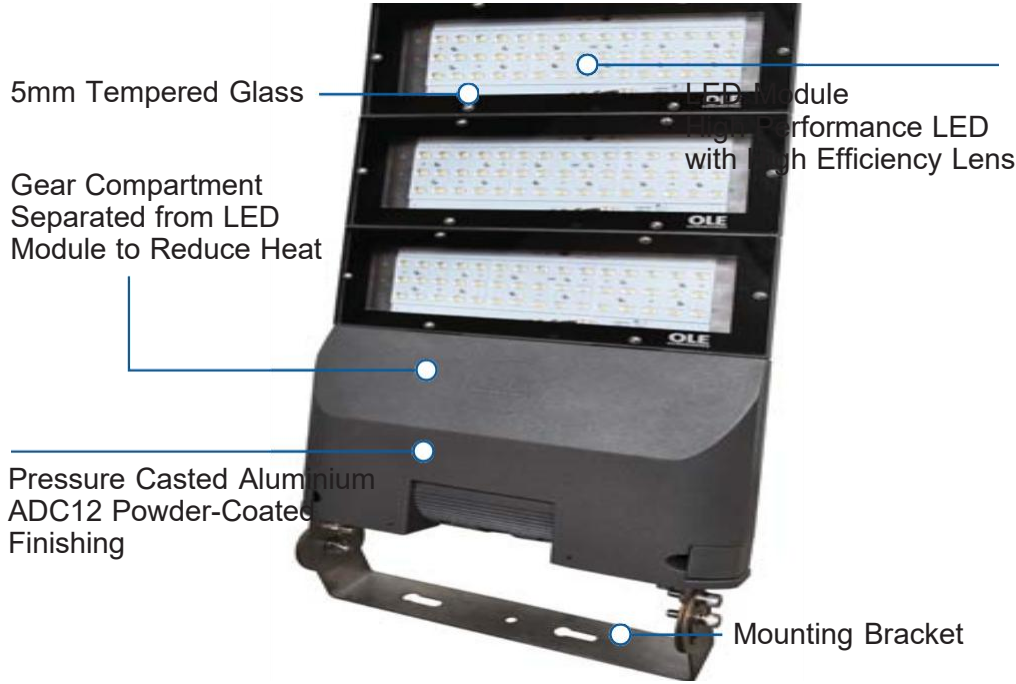

NEMA Socket (Optional)



Clip Lock Gear Tray for Toolless Maintenance



Safety Switch Cut Off Power Supply Once Cover Opened (Optional)

Dimensions

OLE Dura WM120			
Carton Size: (L)590x(W)428x(H)151			
OLE Dura WM180			
Carton Size: (L)753x(W)428x(H)151			
OLE Dura WM240			
Carton Size: (L)753x(W)428x(H)151			
OLE Dura WM300			
Carton Size: (L)930x(W)428x(H)151			