


can provide 7-10 years warranty

FLEXI MINI

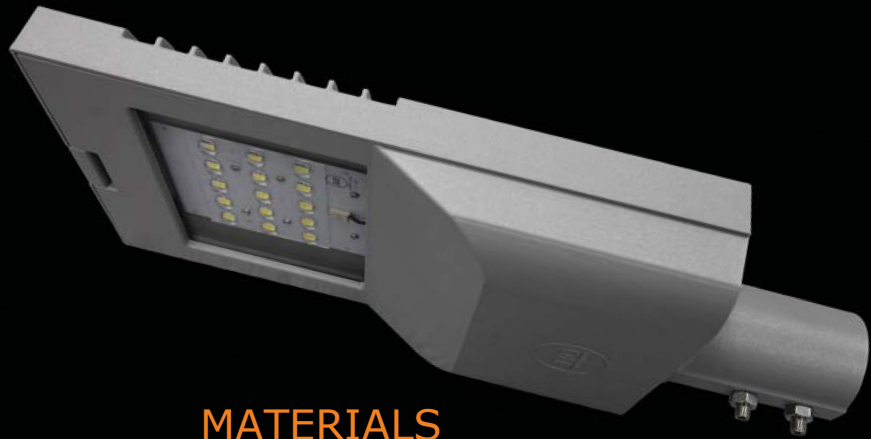

FEATURES

- Input voltage: 220V~240V / Universal input
- Lumen Maintenance: L80 @ 50,000 hours
- Working Temperature: -25°C ~ 50°C
- Storage Temperature: -25°C ~ 80°C
- Power Factor: >0.95 at Full Load

MATERIALS

- Casing material: Die-Cast Aluminum
ADC12, Powder-Coated Finishing
- Cover: Tempered Glass
- Driver: Dimmable, Programmable
& DALI Compatible 1~10V (Optional)
- NEMA Socket: Support NEMA 7 pin (Optional)

IP
65CRI
>70-80THD
5-10%5
years
warranty

SIRIM

Specification

Model No.	Power	Input current	Weight	Size	CCT	Efficacy	Lumen
OLE Flexi Mini B30	30W	0.13A	3.4kg	200 x 429mm	<3500K	111 lm/W	3330 lm
					4000K	116 lm/W	3480 lm
					5000K	115 lm/W	3450 lm
					6000K	114 lm/W	3420 lm
OLE Flexi Mini B40	40W	0.17A	3.6kg	200 x 429mm	<3500K	111 lm/W	4440 lm
					4000K	116 lm/W	4640 lm
					5000K	115 lm/W	4600 lm
					6000K	114 lm/W	4560 lm
OLE Flexi Mini B55	55W	0.23A	3.6kg	200 x 429mm	<3500K	111 lm/W	6105 lm
					4000K	116 lm/W	6380 lm
					5000K	115 lm/W	6325 lm
					6000K	114 lm/W	6270 lm
OLE Flexi Mini B70	70W	0.30A	3.7kg	200 x 429mm	<3500K	111 lm/W	7770 lm
					4000K	116 lm/W	8120 lm
					5000K	115 lm/W	8050 lm
					6000K	114 lm/W	7980 lm
OLE Flexi Mini B80	80W	0.34A	4.1kg	200 x 429mm	<3500K	114 lm/W	9120 lm
					4000K	119 lm/W	9520 lm
					5000K	118 lm/W	9440 lm
					6000K	117 lm/W	9360 lm

*Flux data based on $T_a = 35^\circ\text{C}$, CCT & Lumen + - 10%